





MAX. ENGINE POWER


9.5 kW (12.7 hp)

MAX. DIG DEPTH:

1.69 metres (5ft 6in)

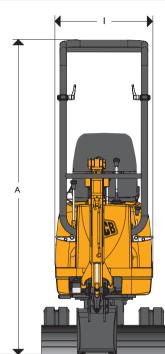

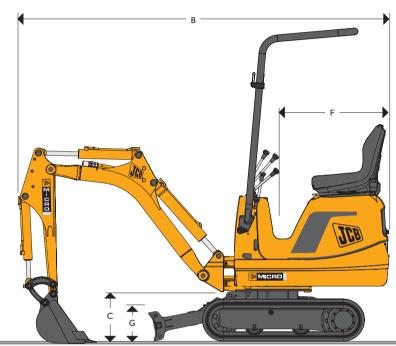





PERFORMANCE AND DIMENSIONS

Ma	achine model		8008
Α	Overall height (trans pos)	mm (ft-in)	2310 (7-7)
В	Overall length (trans pos)	mm (ft-in)	2682 (8-9)
С	Kingpost clearance	mm (ft-in)	356 (1-2)
D	Sprocket idler centres	mm (ft-in)	865 (2-8)
Е	Undercarriage length	mm (ft-in)	1165 (3-10)
F	Tailswing	mm (ft-in)	800 (2-7)
G	Dozer height	mm (in)	200 (0-8)
Н	Dozer width (retracted)	mm (ft-in)	700 (2-4)
	Dozer width (extended)	mm (ft-in)	900 (2-11)

Ma	achine model		8008
I	Superstructure width	mm (ft-in)	695 (2-3)
J	Width over tracks (retracted)	mm (ft-in)	700 (2-4)
	Width over tracks (extended)	mm (ft-in)	865 (2-10)
	Max bucket tearout	kN (lbf)	9.3 (2091)
	Max dipper tearout	kN (lbf)	4.6 (1034)
	Travel speeds kph st Gear	kph (mph)	1.8 (1.1)
	Drawbar pull	kN (lbf)	7.75 (1742)
	Slew speed	rpm	7

A Product of Hard Work





	ENGINE	
Machine model		8008
Gross power	kW (HP)	9.5 (12.7)
Net power	kW (HP)	9.2 (12.3)
Gross torque	Nm (lbf ft)	46@1800 (33.9)
Displacement	СС	762
Gradeability		35deg
Starter motor	kW (HP)	1.2 (1.6)
Alternator	Amp	15

UNDERCARRIAGE		
Machine model		8008
No of bottom rollers		2
Track width	mm (in)	180 (7)
Ground bearing pressure	Kg/cm² (psi)	0.23 (3.3)
Ground clearance	mm (in)	130 (5.0)
Track tensioning		Grease

HYDRAULICS		
Machine model		8008
Pump		2 section gear
Nominal output	Lpm (gpm)	11.2 × 2 (2.5 × 2)
Excavator/track main relief	Bar (psi)	170 (2465)
Slew main relief	Bar (psi)	90 (1305)
Auxiliary hydraulic flow	Ltr (gal)	22.4 (5.0)
Hydraulic motors		Piston

SERVICE CAPACITIES		
Machine model		8008
Water system capacity	Ltr (Gal)	2.6 (0.6)
Fuel tank capacity	Ltr (Gal)	11.5 (2.5)
Engine oil capacity	Ltr (Gal)	3.0 (0.7)
Hydraulic system capacity	Ltr (Gal)	21 (4.6)
Hydraulic tank capacity	Ltr (Gal)	16 (3.5)

MACHINE WEIGHTS		
	8008	
kg (lb)	950 (2094)	
kg (lb)	875 (1929)	
kg (lb)	35 (77)	
	kg (lb)	

STANDARD AND OPTIONAL EQUIPMENT		
Machine model	8008	
TOPS certified frame	O†	
Front handrail only	0	
Full audible systems	S	
Toolkit	0	
Slew travel lock	S	
Rubber tracks	S	
Extending undercarriage	S	
ISO pattern controls	S	
Vinyl static seat	S	
880mm dipper	S	
Boom offset	S	
Dozer blade	S	
Double acting pipework	0	
Boom worklight	0	
General purpose buckets:		
160mm (6") to 410mm (16")	0	
Ditching / grading buckets:		
700mm (28")	0	
JCB Breaker: HM60	-	
Earth drills	0	

[†] Please note the TOPS frame may be a legal requirement in your territory.

A Product of Hard Work


^{*} Operating weight to ISO 6016 including 2 post TOPS frame, rubber tracks, standard dipper, standard dozer, 300mm bucket, full tanks and a 75kg operator.

S = Standard O = Optional






	BOOM SWING RADIUS			
Ma	Machine model 8008			
K	Boom swing right	degrees	70	
L	Boom swing left	degrees	70	

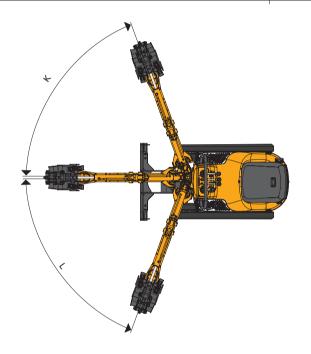

WORKING RANGE				
Machine model 8008				
Max dig height	mm (ft-in)	2840 (9-4)		
Max dump height	mm (ft-in)	1980 (6-6)		
Max vertical dig depth	mm (ft-in)	1480 (4-10)		
Max dig depth-dozer up	mm (ft-in)	1690 (5-6)		
Max ground level reach	mm (ft-in)	3110 (12-2)		
Bucket rotation	degrees	191°		
Dozer cut above ground	mm (in)	200 (0-8)		
Dozer cut below ground	mm (in)	110 (0-4)		
Min. slew radius	mm (ft-in)	1240 (4-1)		
	Max dig height Max dump height Max vertical dig depth Max dig depth-dozer up Max ground level reach Bucket rotation Dozer cut above ground Dozer cut below ground	Max dig height mm (ft-in) Max dump height mm (ft-in) Max vertical dig depth mm (ft-in) Max ground level reach mm (ft-in) Bucket rotation degrees Dozer cut above ground mm (in) Dozer cut below ground mm (in)		

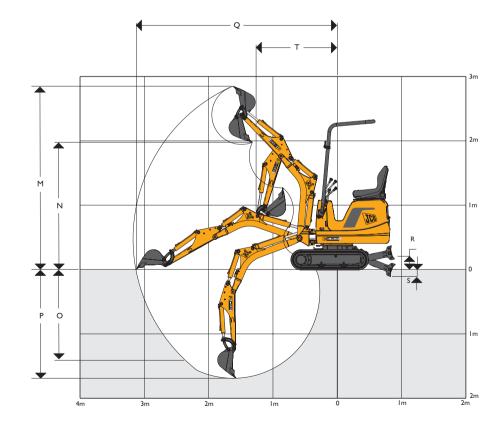





A GLOBAL COMMITMENT TO QUALITY

JCB's total commitment to its products and customers has helped it grow from a one-man business into Britain's largest privately owned manufacturer of backhoe loaders, crawler excavators, wheeled excavators, telescopic handlers, wheeled loaders, dump trucks, rough terrain fork lifts, industrial fork lifts, mini/midi excavators, skid steer loaders and tractors.

By making constant and massive investments in the latest production technology, the JCB factories have become some of the most advanced in Europe.

By leading the field in innovative research and design, extensive testing and stringent quality control, JCB machines have become renowned all over the world for performance, value and reliability.

And with a global sales and service network of over 400 distributors and agents, the company exports over 70% of its production to all five continents.

Through setting the standards by which others are judged, JCB has become one of Britain's most impressive success stories.



JCB Sales Limited, Rocester, Staffordshire ST14 5JP. Tel: 01889 590312. Fax: 01889 590588. Web: http://www.jcb.com

JCB reserves the right to change specifications without notice. Illustrations shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.



A Product

of Hard Work